



■ 型号含义

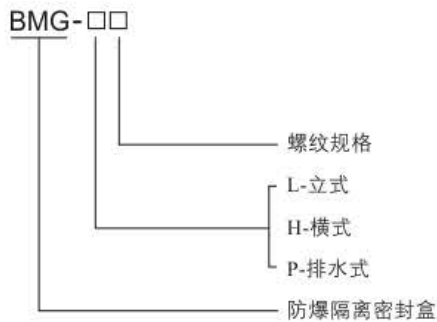

■ 适用范围

- 1区、2区ⅡA~ⅡC类爆炸性气体环境, 和/或20区、21区、22区爆炸性粉尘场所;
- 户内、户外(IP66);
- 用于化工、炼油、石油开采、海洋石油平台、油轮、制药、军工等危险场所, 作电气线路钢管布线中防爆隔离密封之用。

■ 防爆隔离密封盒和密封填料的使用示意图

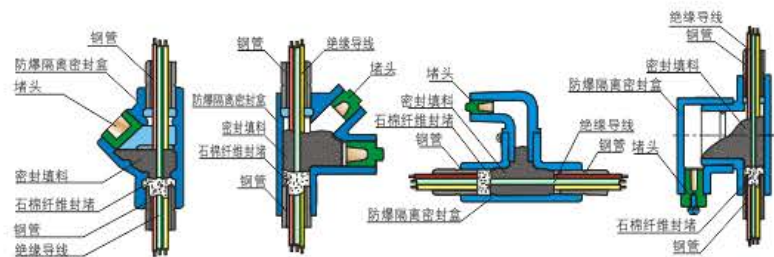

BMG-L I

BMG-L II

BMG-H


BMG-P

■ 产品特点

铝合金外壳, 表面高压静电喷塑。

■ 主要技术参数及外形尺寸


型号 尺寸 螺纹规格	BMG-L I -□		BMG-L II -□		BMG-H-□		BMG-P-□		电缆外径(mm)	防爆标志
	A (mm)	B (mm)	A (mm)	B (mm)	A (mm)	B (mm)	A (mm)	B (mm)		
G1/2 M20 × 1.5	70	52	78.5	52	80	95	80	80	φ 7 ~ φ 10	Ex db Ⅱ C Gb Ex tb Ⅲ C Db
G3/4 M25 × 1.5	70	58.5	84	59.5	80	95	85	80	φ 9 ~ φ 14	
G1 M32 × 1.5	90	73.5	98	69.5	90	100	90	85	φ 12 ~ φ 18	
G1 1/4 M40 × 1.5	110	91.5	112	90.5	110	110	110	95	φ 15 ~ φ 26	
G1 1/2 M50 × 1.5	109.5	91.5	123	98	118	127	118	109	φ 18 ~ φ 30	
G2 M63 × 1.5	129	110	130	111	128	141	128	125	φ 25 ~ φ 37	
G2 1/2 M75 × 1.5	162	135.5	—	—	162	166	162	138	φ 29 ~ φ 38	
G3 M90 × 1.5	175	155	—	—	168	180	168	152	φ 30 ~ φ 51	
G4 M110 × 1.5	185	175.5	—	—	178	208	178	181	φ 41 ~ φ 72	




BMG-L I



BMG-L II



BMG-H



BMG-P